

## Appearance



## Description


CCAM belongs to the high-speed acousto-optic pulse modulator which realizes the intensity modulation over the laser according to the inputted pulse signal and gets corresponding digitally coded optical signal by inputting the digital signal of different codes and frequencies (TTL level) into the driving power supply of modulator. It is mainly used in such fields as laser text-image processing and laser digital communication.

This product has such characteristics as quick modulation rate, small volume, high efficiency, high extinction ratio, easy coding and convenient use.

## Standard Specifications

Interaction Material	Lead molybdate or tellurium oxide
Wavelength	633nm(450-850nm,optional)
Transmission(single pass)	>93%
Frequency	100MHz(60-150MHz,optioa)
Diffraction efficiency	>75%
Active aperture	1.2mm, 0.9mm
Extinction ratio	>1000:1
Pulse repetition frequency	1MHz, 4MHz
RF power rating	<1.5W
Input Impedance	50Ω

## Mechanical Dimensions

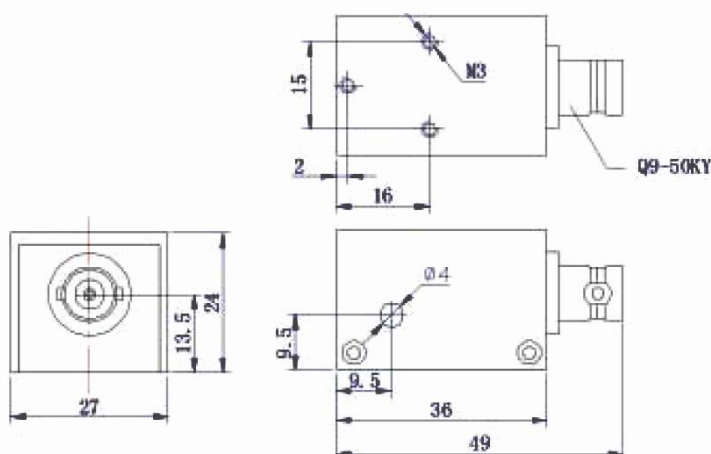

This product is provided with the auxiliary driver, and can be customized according to user requirements.

**Changchun New Industries Optoelectronics Tech. Co., Ltd**  
<http://www.cnioptics.com>

## ◆ CONTACT

No.888, Jinhu Road, High-tech zone,  
Changchun 130103, China

Email: sales@cnioptics.com

Phone: 0086-431-87034313

Fax: 0086-431-87033597